


End Area		Volume	
Cut	Fill	Cut	Fill
0	136	0	207
0	229	0	428
0	414	0	755
0	222	0	193
0	142	0	96
0	304	0	178
0	51	0	263
0	0	154	165
0	0	231	271
0	24	412	428

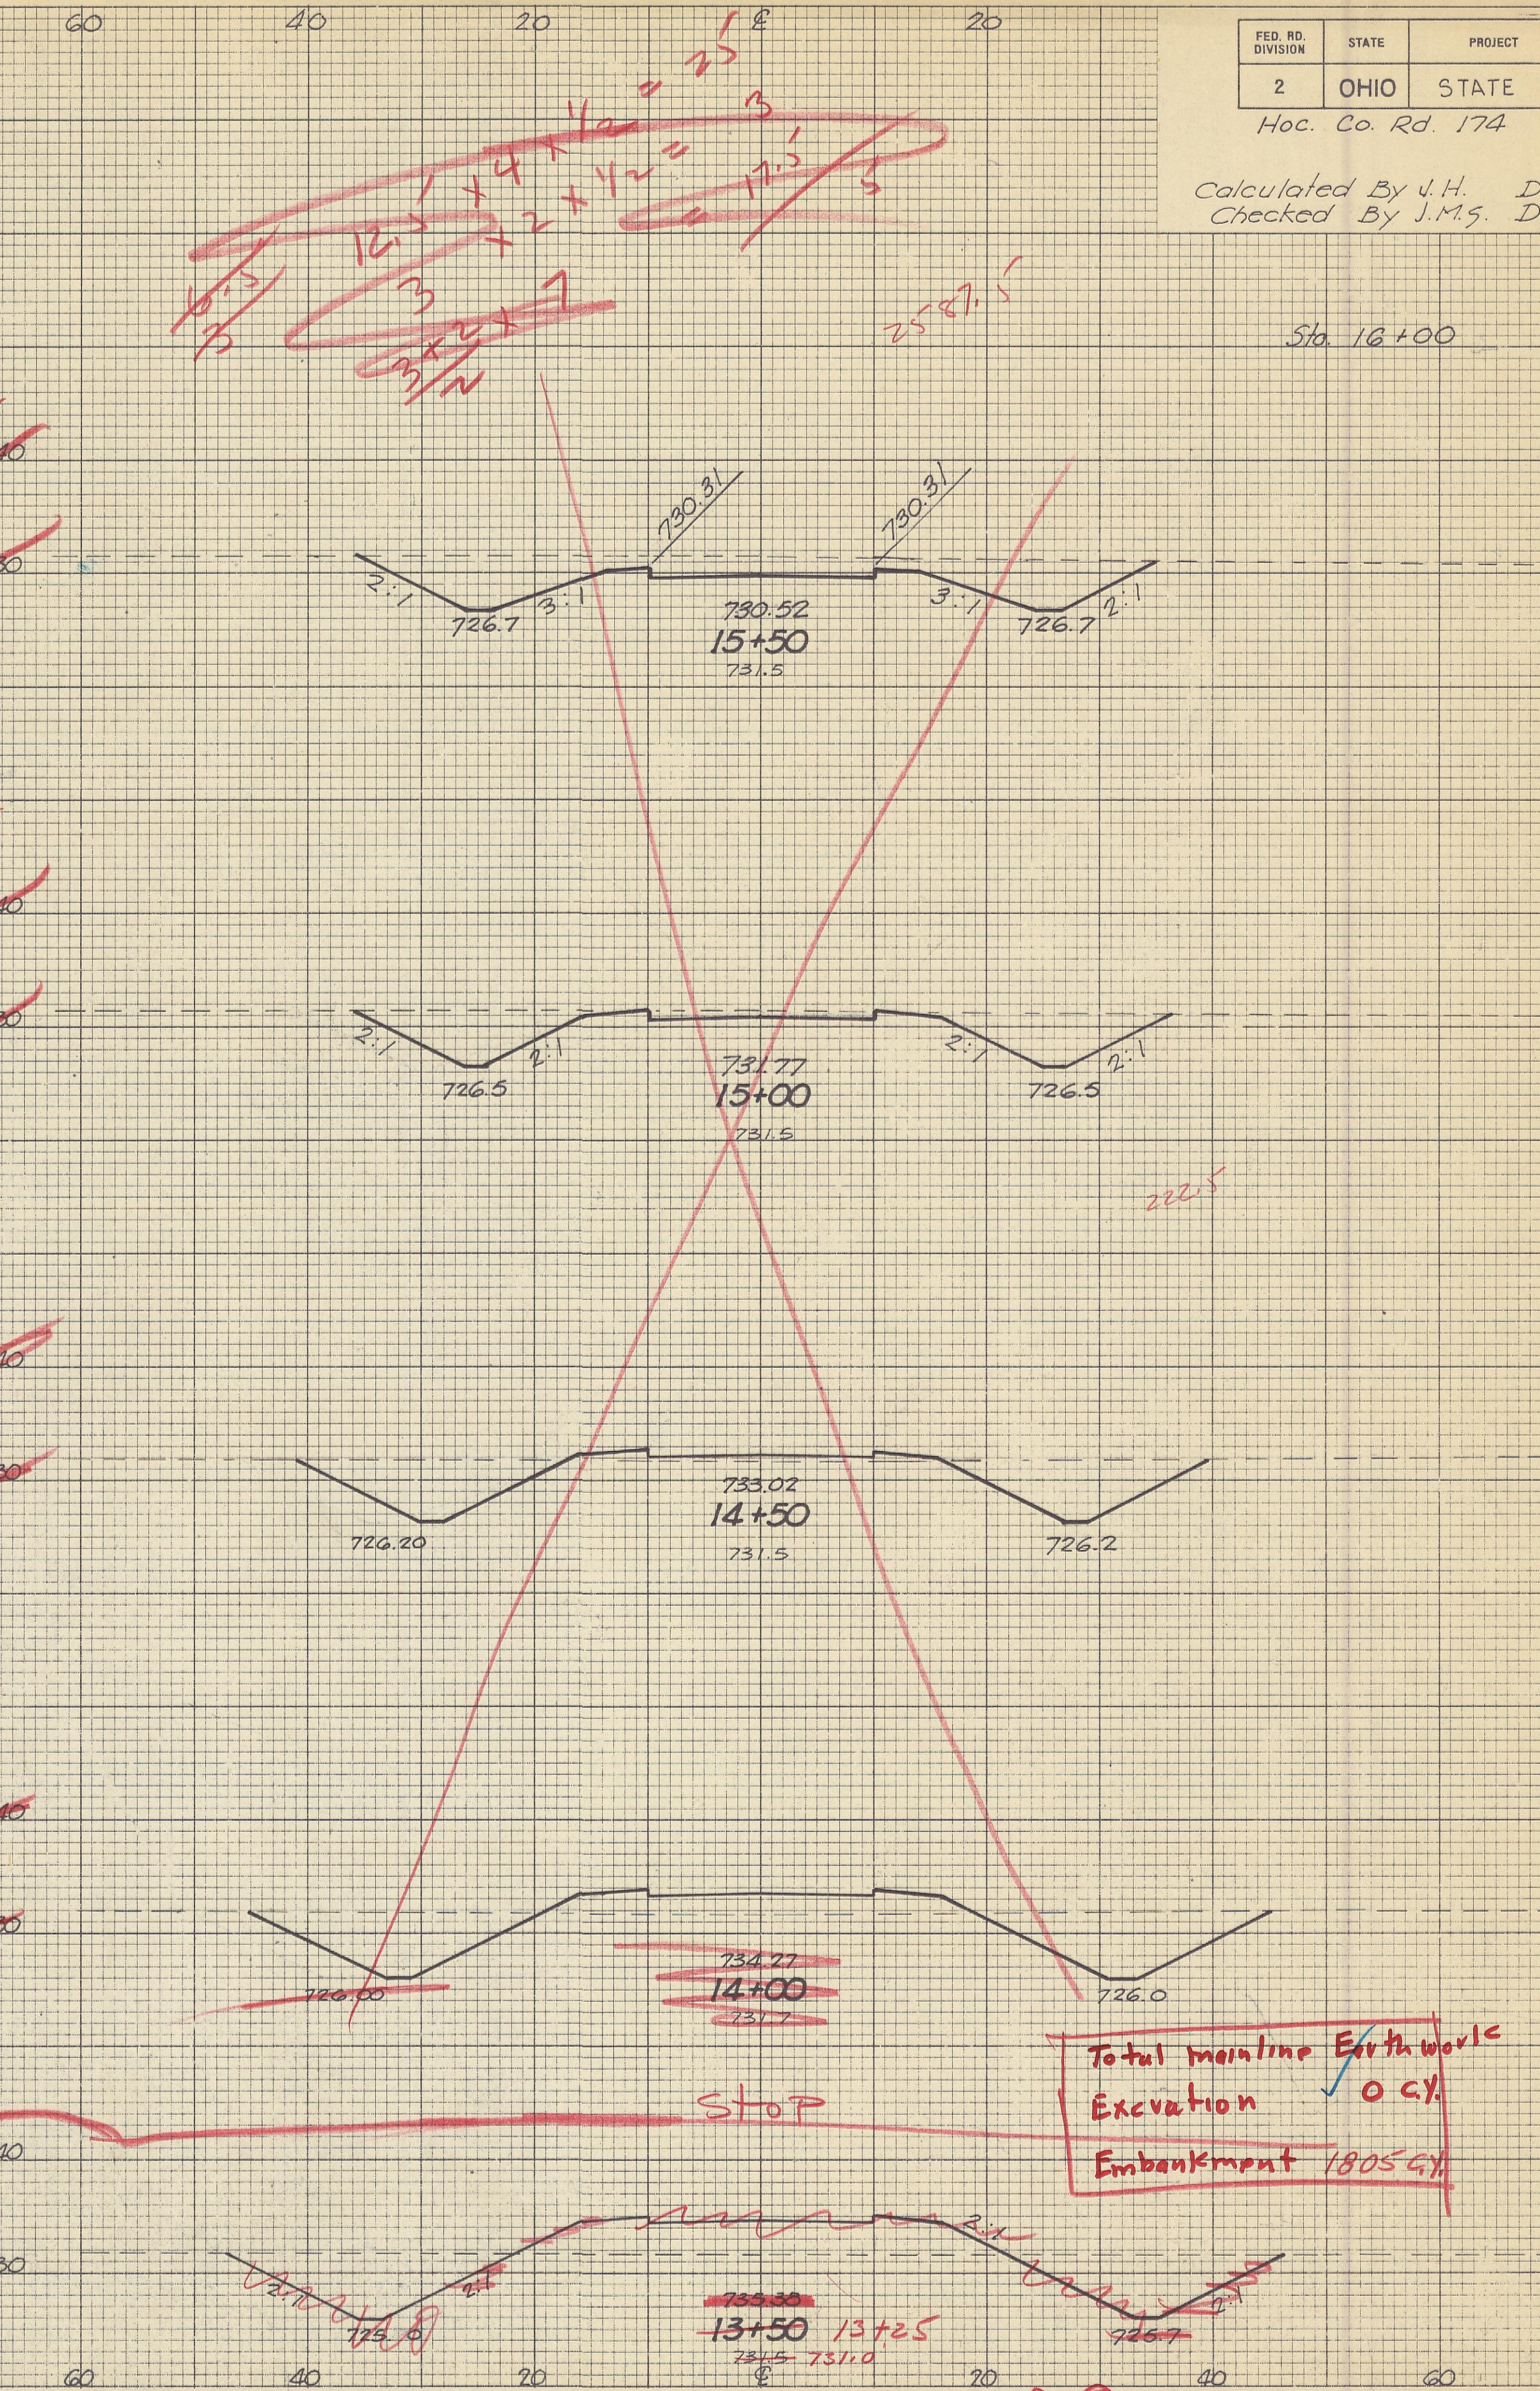

FED. RD. DIVISION 2 OHIO STATE PROJECT
 Calculated By J.H. Date 6-2-72
 Checked By J.M.S. Date 6-7-72

END AREA	VOLUME	
	CUT	FILL
230	0	0
161	0	362
127	0	267
141	12	248
173	80	317
169	112	159
136	0	96

Total mainline Earthwork
 Excavation 0 CY
 Embankment 1805 CY

STA. 10+00 To STA. 15+50 - 13+25