


STRUCTURE CO. RD. 76  
 STA. 3+00  
 REF. No 1-D SHEET 59

ESTIMATED QUANTITIES

- \* 603 36" Conduit Type A 706.02 or 704.05 Type C 62 Lin. Ft.
- \* 602 Concrete Masonry 1.38 Cu. Yd.
- \* 601 Rock Channel Protection Type B 7 Cu. Yd.
- \* 601 Riprap 6" Reinforced Concrete Slab. 17 Sq. Yd.
- \* 660 Sodding 10 Sq. Yd.

\* Quantities To Plan Sheet 59

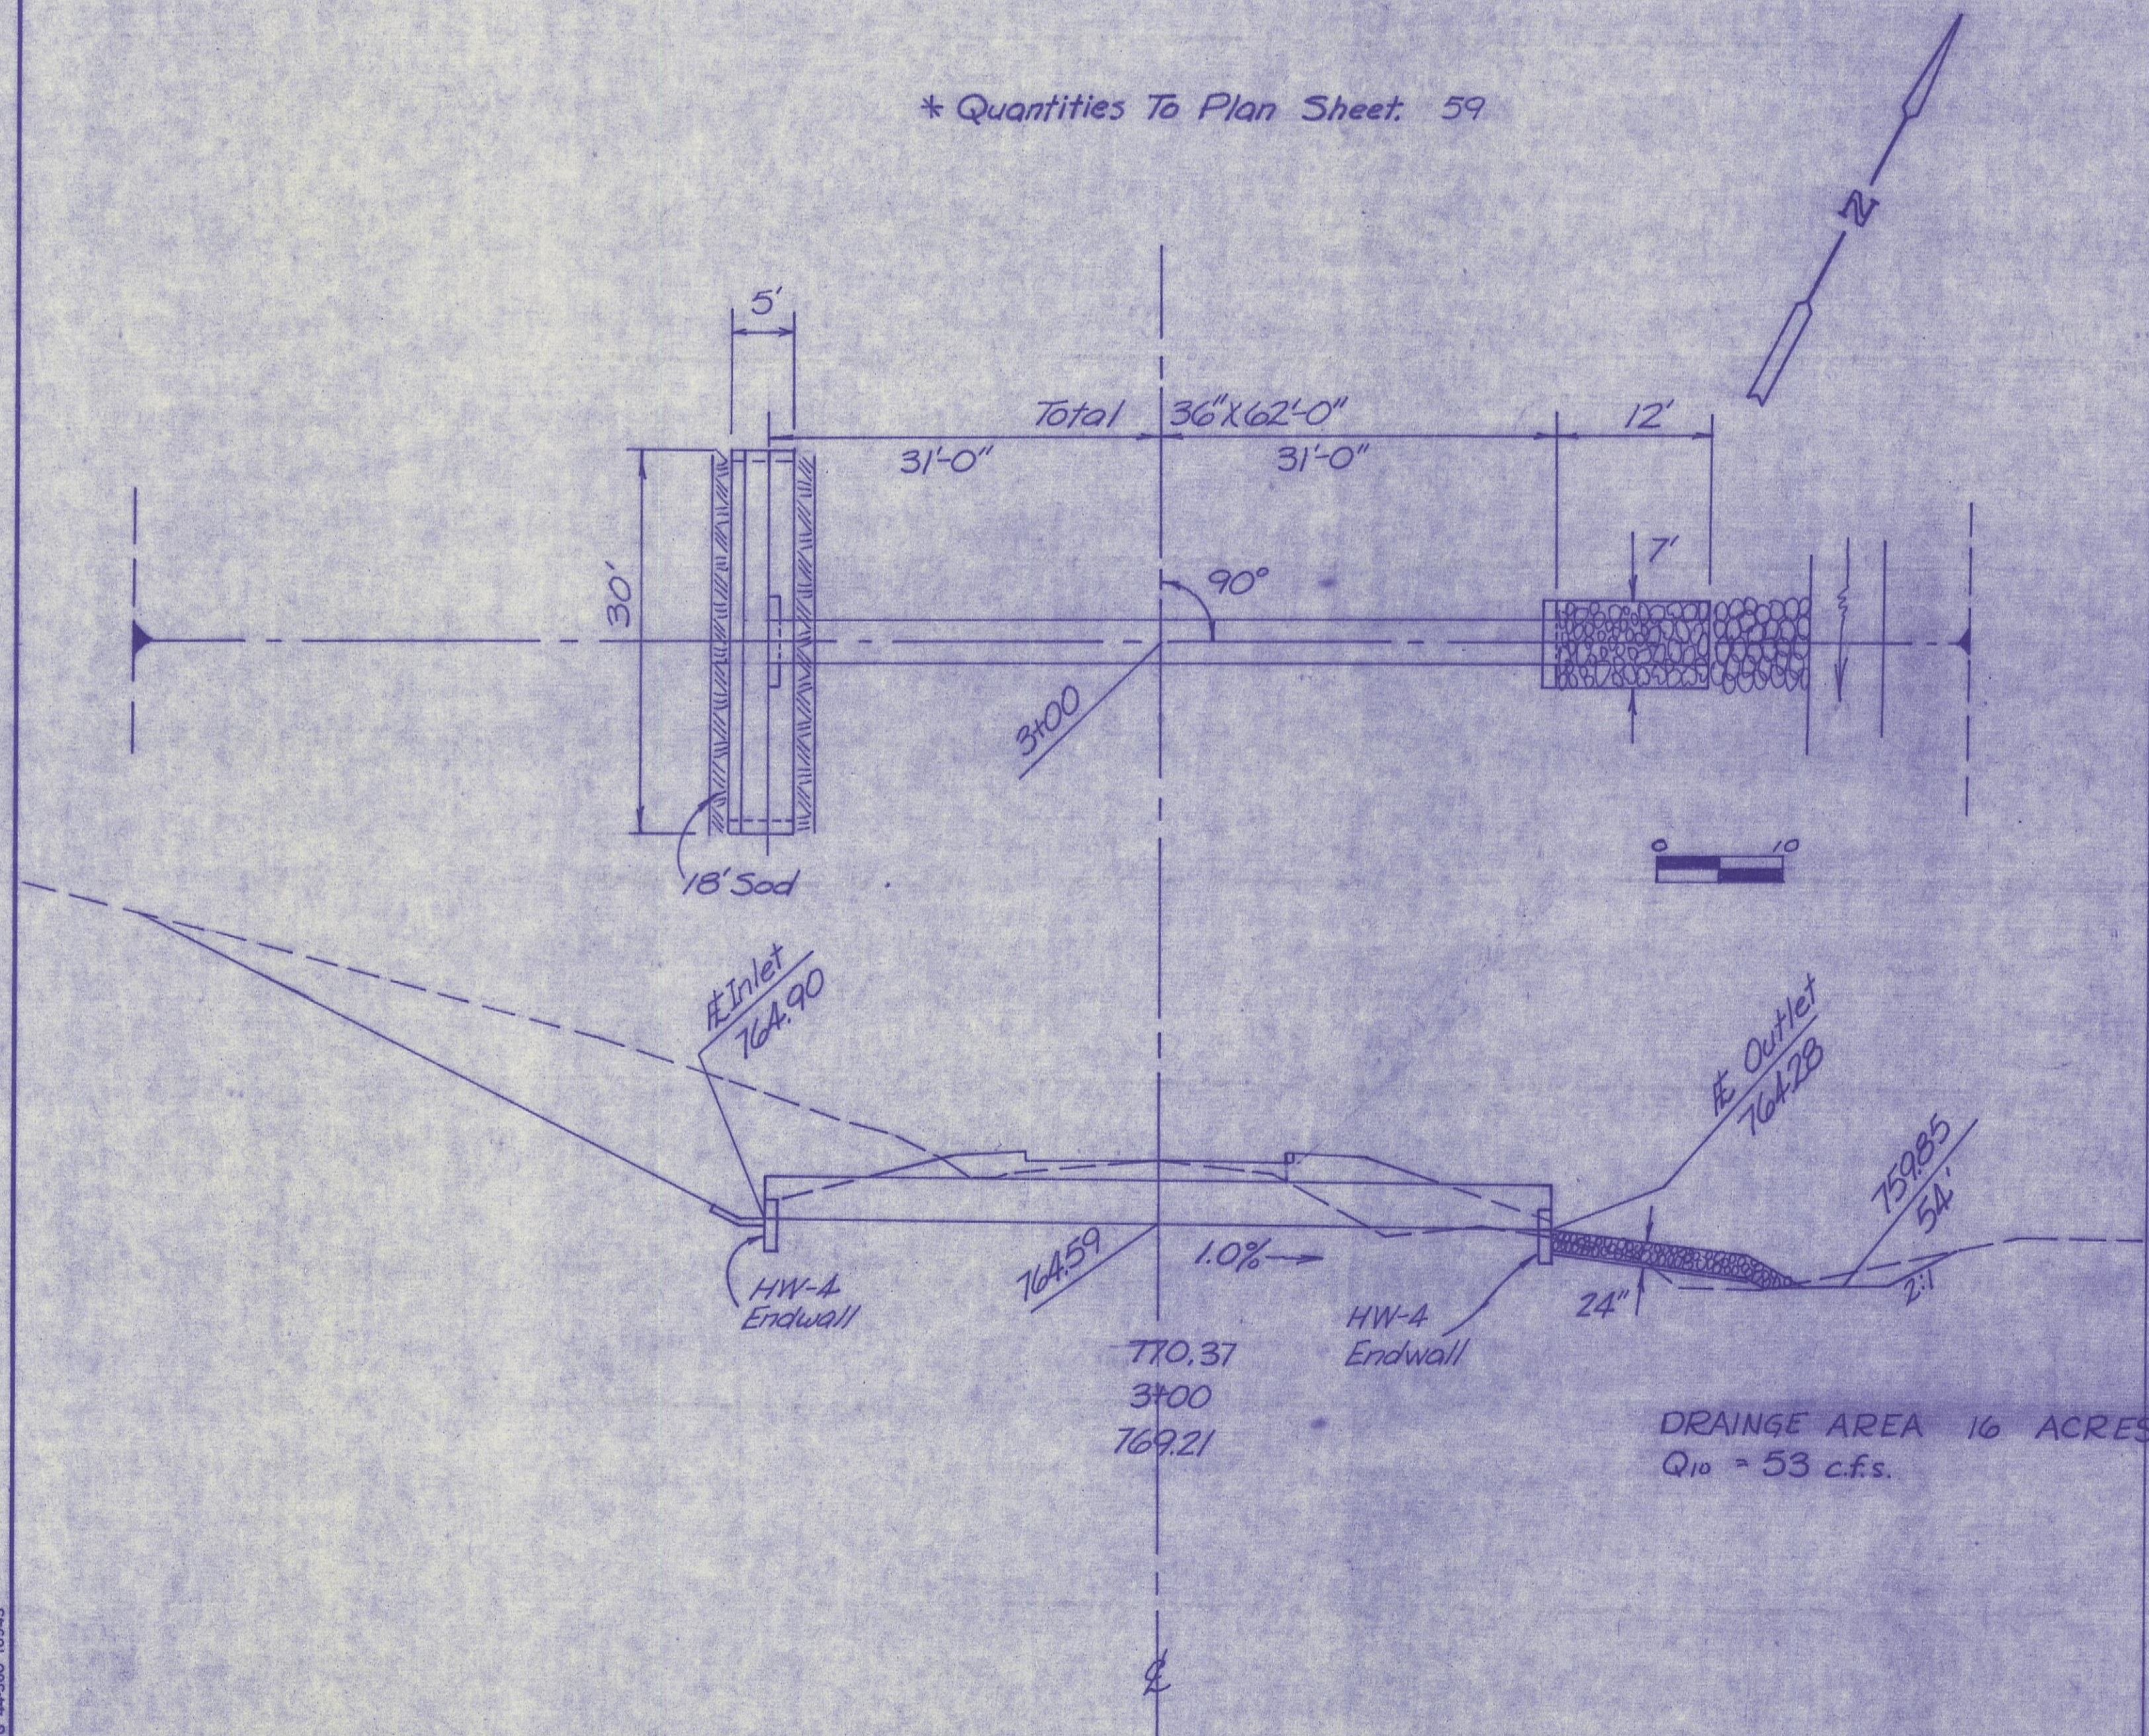

Calculated	Checked
By: F.B.	By: DS
Date: 11/14/72	Date: 1-4-73

DRAINAGE AREA 16 ACRES  
 $Q_{10} = 53$  c.f.s.