
# PLAT OF SURVEY

Situated in the State of Ohio, County of Hocking, Township of Falls, City of Logan and being a depiction for the vacation of all of Lot No. 67, all of Kathy Avenue and a part of Elizabeth Avenue of the Bowers — Rokeith 3rd Addition as recorded in Plat Cabinet 2, Page 121 and 122 and located in Section 13, Township 14 and Range 17.



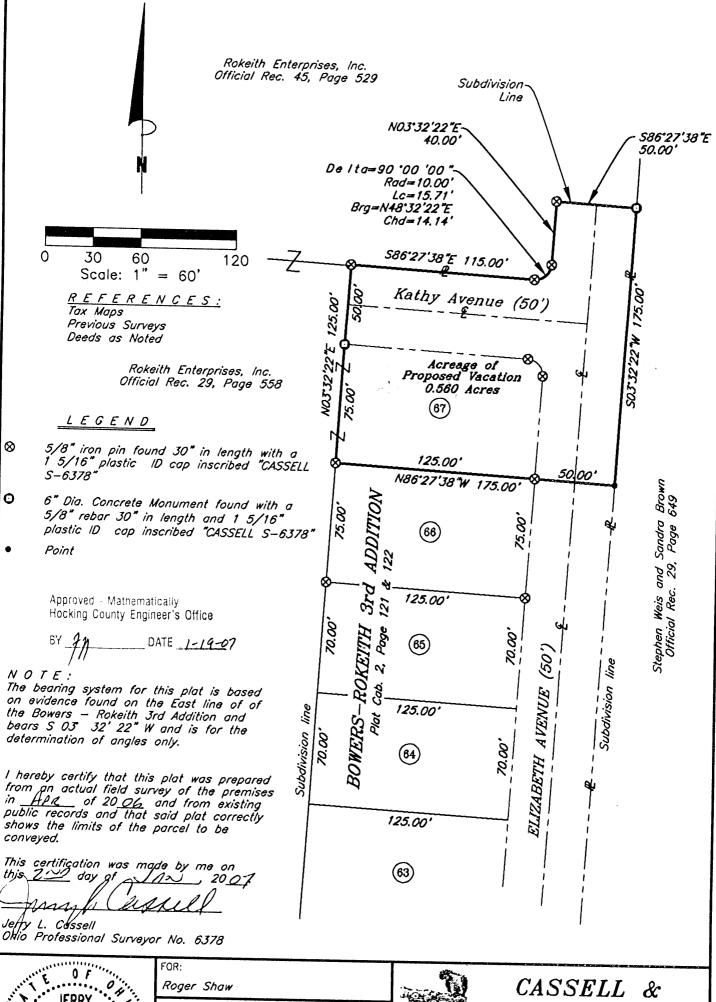

FOR:
Roger Shaw

BY:
Jerry Cassell

DATE:
Jan. 2, 2007

PROJ. NO.:
H0072805



# CASSELL & ASSOCIATES, LLC

PROFESSIONAL LAND SURVEYING

20525 Buena Vista Road Rockbridge, Ohio 43149 (740) 969—0024

#### **DESCRIPTION OF A 0.560 ACRE PARCEL**

For vacation of part of Bowers-Rokeith Third Addition

Situated in the State of Ohio, County of Hocking, Township of Falls, City of Logan and being all of Lot No. 67, all of Kathy Avenue and a part of Elizabeth Avenue of the Bowers-Rokeith Third Addition as recorded Plat Cabinet 2, Page 121 and Page 122 and located in Section 13, Township 14, Range 17 and being more particularly described as follows:

**BEGINNING** at a 5/8 inch iron pin found 30" in length with a 1 5/16 inch plastic identification cap inscribed "CASSELL S-6378", said iron pin being the Southwesterly corner of Lot No. 67;

Thence along the Westerly, Northerly and Easterly lines of the aforementioned Subdivision the following six (6) courses:

- 1) N 03° 32' 22" E a distance of 125.00 feet to a 5/8 inch iron pin found 30" in length with a 1 5/16 inch plastic identification cap inscribed "CASSELL S-6378" (passing a 6" diameter concrete monument found with a 5/8 inch rebar 30 inches in length and a 1 5/16 inch plastic identification cap inscribed "CASSELL S-6378" at 75.00 feet;
- 2) S 86° 27' 38" E a distance of 115.00 feet to a 5/8 inch iron pin found 30" in length with a 1 5/16 inch plastic identification cap inscribed "CASSELL S-6378";
- 3) With a curve to the left having a deflection angle of 90° 00′ 00″, a radius of 10.00 feet and a curve length of 15.71 feet, N 48° 32′ 22″ E a chord length of 14.14 feet to a 5/8 inch iron pin found 30″ in length with a 1 5/16 inch plastic identification cap inscribed "CASSELL S-6378";
- 4) N 03° 32' 22" E a distance of 40.00 feet to a 5/8 inch iron pin found 30" in length with a 1 5/16 inch plastic identification cap inscribed "CASSELL S-6378";
- 5) S 86° 27' 38" E a distance of 50.00 feet to a 6" diameter concrete monument found with a 5/8 inch rebar 30 inches in length and a 1 5/16 inch plastic identification cap inscribed "CASSELL S-6378;
- 6) S 03° 32' 22" W a distance of 175.00 feet to a point;

Thence N 86° 27′ 38″ W crossing Elizabeth Avenue, along the South line of Lot No. 67 and a new line of Rokeith Enterprises, Inc. (Official Record 29, Page 558) created by the platting of the Bowers-Rokeith Third Addition a distance of 175.00 feet (passing a 5/8 inch iron pin found 30″ in length with a 1 5/16 inch plastic identification cap inscribed "CASSELL S-6378" at 50.00 feet) to the point of beginning, containing 0.560 Acres, more or less, and subject to all legal easements and rights of way of record.

All iron pins set are 5/8-inch iron pins 30" in length with a 1 5/16 inch plastic identification caps inscribed "CASSELL S-6378."

The bearing system for this description is based on the East line of the Bowers-Rokeith Third Addition and Bears S 03° 32′ 22″ W and is for the determination of angles only.


This description was prepared on Jan. 2, 2007 by Jerry L. Cassell, Ohio Professional Surveyor No. 6378 and is based on an actual field survey of the premises in April of 2006 and existing public records.

JERRY L CASSELL S-6378

Jerry Cassell P S

Approved Mathematically Hocking County Engineer's Office

6Y // DATE 1-19-07

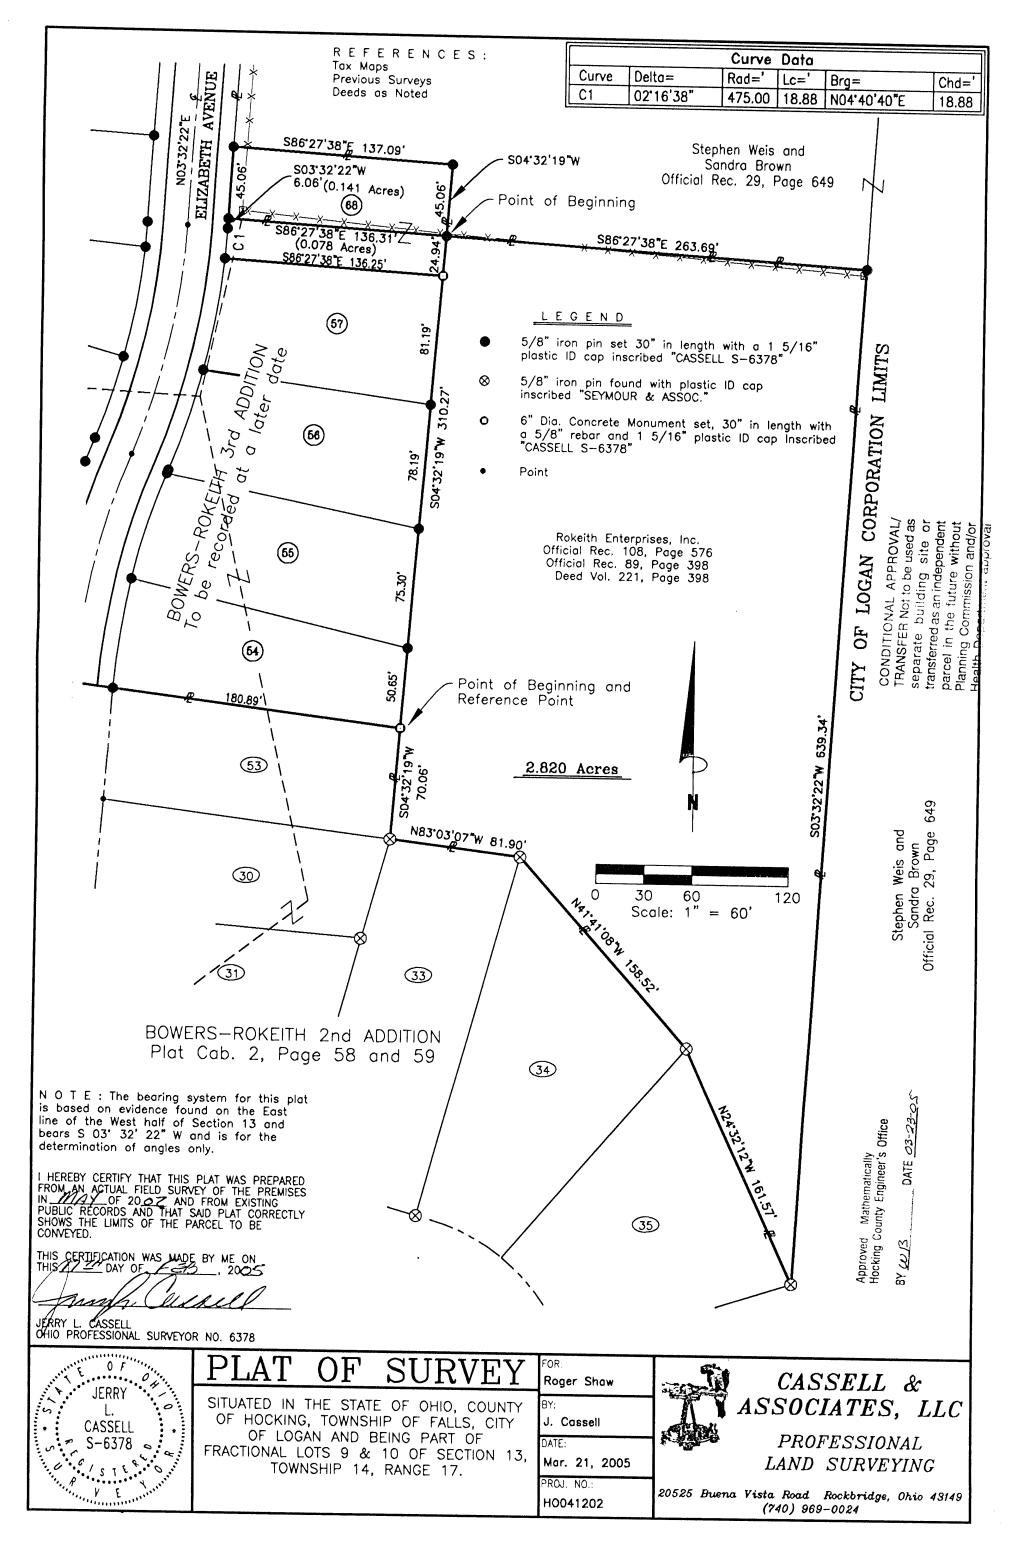

Logan City
Falls13
2.82AL.
FLAND
141Ac.

## **DESCRIPTION OF A 2.820 ACRE PARCEL OF LAND**

Situated in the State of Ohio, County of Hocking, Township of Falls, City of Logan and being a part of a parcel of land conveyed to Rokeith Enterprises, inc. (hereinafter referred to as "Grantor") in Official Record 89, Page 374, and located in Fractional Lots 9 and 10, Section 13, Township 14, Range 17 and being more particularly described as follows:

**BEGINNING** at a concrete monument set, said monument being the Northeasterly corner of Lot No. 53 of the Bowers-Rokeith 2nd Addition as recorded in Plat Cabinet 2, Page 58 and 59;

Thence N 04° 32′ 19″ E through the Grantor's lands a distance of 310.27 feet to an iron pin set, said iron pin being on the Grantor's Northerly property line and on the Southerly property line of a parcel of land conveyed to Stephen Weis and Sandra Brown in Official Record 29, Page 649;

Thence S 86° 27' 38" E along the Grantors Northerly property line and the Southerly property line of the aforementioned Weis and Brown parcel a distance of 263.69 feet to an iron pin set, said iron pin being the Northeasterly property corner of the Grantor and a property corner of the aforementioned Weis and Brown parcel;

Thence S 03° 32' 22" W along the Easterly property line of the Grantor and a property line of the aforementioned Weis and Brown parcel a distance of 639.34 feet to an iron pin found with a plastic identification cap inscribed "SEYMOUR & ASSOC.", said iron pin being the Southeasterly corner of Lot No. 35 of the aforementioned Bowers-Rokeith 2nd Addition:

Thence along the property lines of the Grantor and the Northerly line of the aforementioned Bowers-Rokeith 2nd Addition (Lot No.'s 35-33 and Lot No. 53) the following four (4) courses:

- 1) N 24° 32' 12" W a distance of 161.57 feet to an iron pin found with a plastic identification cap inscribe "SEYMOUR & ASSOC.";
- 2) N 41° 41' 08" W a distance of 158.52 feet to an iron pin found with a plastic identification cap inscribed "SEYMOUR & ASSOC.";
- 3) N 83° 03' 07" W a distance of 81.90 feet to an iron pin found with a plastic identification cap inscribed "SEYMOUR & ASSOC.";

4) N 04° 32' 19" E a distance of 70.06 feet to the point of beginning, containing 2.820 Acres, more or less and subject to all legal easements and rights of way of record.

All iron pins set are 5/8-inch iron pins 30" in length with a 1 5/16" plastic identification caps inscribed "CASSELL S-6378."

The bearing system for this description is based on the evidence found on the East line of the West Half of Section 13, Township 14, Range 17 and bears \$ 03° 32' 22" E and is for determination of angles only.

This description was prepared on February 17, 2005 by Jerry L. Cassell, Ohio Professional Surveyor No. 6378 and is based on an actual field survey of the premises in May of 2002 and existing public records.

JERRY L. CASSELL S-6378

Approved - Mathematically Hocking County Engineer's Office

EY WB DATE 03-23-05

CONDITIONAL APPROVAL/ TRANSFER Not to be used as separate building site or transferred as an independent parcel in the future without Planning Commission and/or Health Department approval

### **DESCRIPTION OF A 0.141 ACRE PARCEL OF LAND**

Situated in the State of Ohio, County of Hocking, Township of Falls, City of Logan and being a part of a parcel of land conveyed to Stephen Weis and Sandra Brown (hereinafter referred to as "Grantor") in Official Record 29, Page 649 and located in Fractional Lots 9 and 10, Section 13, Township 14, Range 17 and being more particularly described as follows:

Commencing for reference at a concrete monument set, said monument being the Northeasterly corner of Lot No. 53 of the Bowers-Rokeith 2nd Addition as recorded in Plat Cabinet 2, Page 58 and 59 and a property corner of a parcel of land conveyed to Rokeith Enterprises, Inc. in Official Record 89, Page 374;

Thence N 04°32′ 19″ E through the lands of the aforementioned Rokeith Enterprises, Inc. parcel a distance of 310.27 feet to an iron pin set, said iron pin being on the Grantor's Southerly property line and the Northerly property line of the aforementioned Rokeith Enterprises, Inc. parcel and the TRUE POINT OF BEGINNING for the parcel herein described;

Thence N 86° 27' 38" W along the Grantors Southerly property line and the Northerly property line of the aforementioned Rokeith Enterprises, Inc. parcel a distance of 136.31 feet to an iron pin set, said iron pin being the Southeasterly property corner of the Grantor;

Thence N 03° 32' 22" E along the Grantor's Westerly property line a distance of 45.06 feet to an iron pin set;

Thence through the Grantor's lands the following two (2) courses:

- 1) S 86° 27' 38" E a distance of 137.09 feet to an iron pin set;
- 2) S 04° 32' 19" W a distance of 45.06 feet to the point of beginning, containing 0.141 Acres, more or less and subject to all legal easements and rights of way of record.

All iron pins set are 5/8-inch iron pins 30" in length with a 1 5/16" plastic identification caps inscribed "CASSELL S-6378."

The bearing system for this description is based on the evidence found on the East line of the West Half of Section 13, Township 14, Range 17 and bears S 03° 32' 22" E and is for determination of angles only.

This description was prepared on February 17, 2005 by Jerry L. Cassell, Ohio Professional Surveyor No. 6378 and is based on an actual field survey of the premises in May of 2002 and existing public records.

Approved - Mathematically Hocking County Engineer's Office

BY WB DATE 03-23-05

Jerry L. Cassell, P.S.

CASSELL S-6378 -

> CONDITIONAL APPROVAL/ TRANSFER Not to be used as separate building site or transferred as an independent parcel in the future without Planning Commission and/or Health Department approval