

STRUCTURE HOC - 312 - 0013



STA. 8+00

REF. No 2-D SHEET 65

FED. RD. DIVISION	STATE	PROJECT
2	OHIO	

88


HOC-93-(16.35)(17.63)

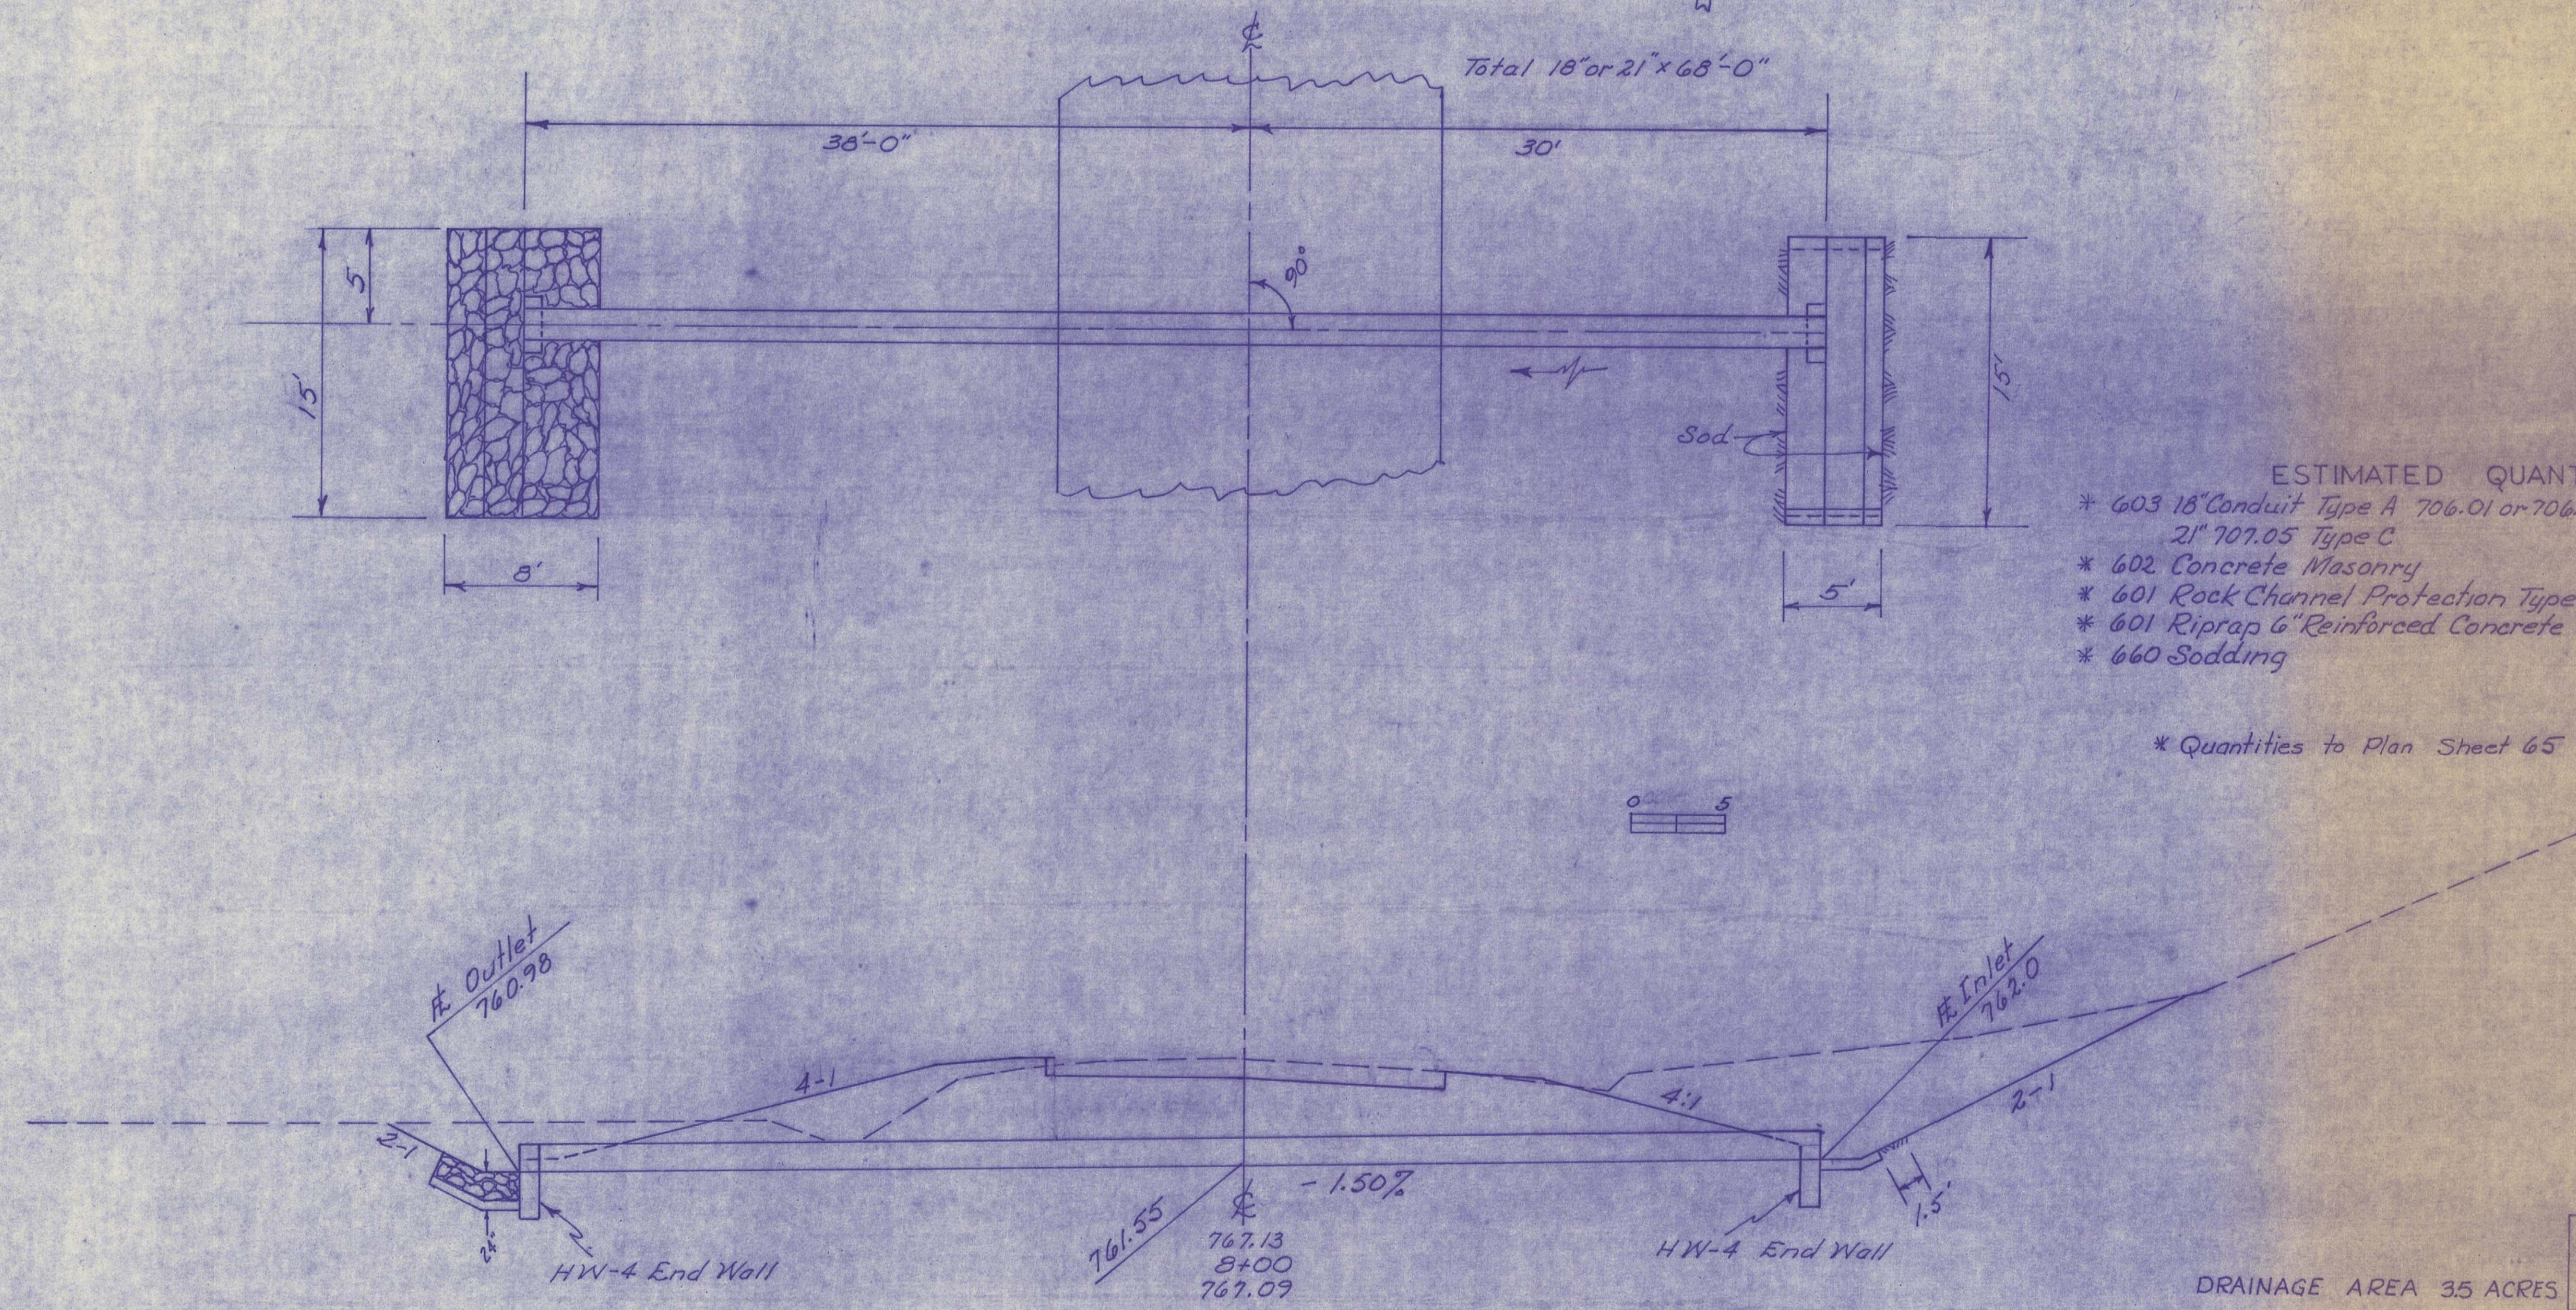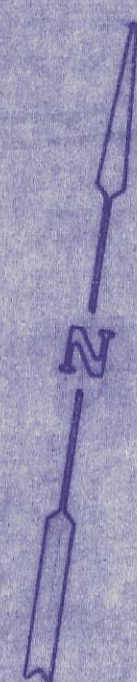

ESTIMATED QUANTITIES

* 603 18" Conduit Type A 706.01 or 706.02 or 706.08 or 21" 707.05 Type C	68 Lin. Ft.
* 602 Concrete Masonry	0.78 Cu. Yd.
* 601 Rock Channel Protection Type B	9 Cu. Yd.
* 601 Riprap 6" Reinforced Concrete Slab	9 Sq. Yd.
* 660 Sodding	5 Sq. Yd.

* Quantities to Plan Sheet 65

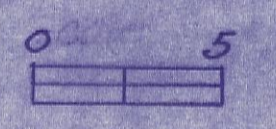

Calculated By: F.B.	Checked By: DS
Date: 1-24-73	Date: 1-4-73

DRAINAGE AREA 35 ACRES
Q10 = 11 c.f.s.