FED. RD. DIVISION	STATE	PROJECT	
2	OHIO	STATE	

1/38

HOC-278-6.01

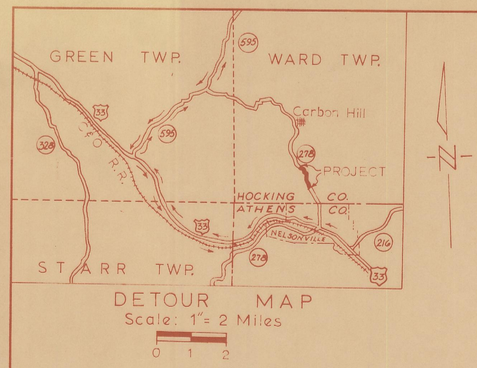

STATE OF OHIO
DEPARTMENT OF HIGHWAYS
HOC-278-6.01
WARD TOWNSHIP
HOCKING COUNTY

CONVENTIONAL SIGNS

County Line
Township Line
Section Line
Center Line
Corporation Line
Fence Line
Guard Rail — Existing / Proposed
Property Line — Unfenced / Fenced
Rail Road
Utility Poles — Telephone / Power
Trees & Stumps
Right-of-Way
Proposed / Existing

INDEX OF SHEETS

Title Sheet	Sheet No. 1
Schematic Layout Plan	" " 2
Typical Section	" " 3
General Notes	" " 4
General Summary	" " 5
Plan & Profile	" " 6-9
Cross Section	" " 10-21
Approach Details	" " 22-30
Structures 20' Span & Under	" " 31-34
Right of Way	" " 35-38
Soil Profile	

LINE DATA

BEGIN PROJECT	STA 317+50.00
END PROJECT	STA 347+00.00
GROSS LENGTH OF PROJECT	2950.00 Lin. ft.
ADDITIONS OR DEDUCTIONS	
NET LENGTH OF PROJECT	2950.00 Lin Ft or 0.558 Mi
BEGIN WORK	STA 316+50.00
END WORK	STA 348+50.00
GROSS LENGTH OF WORK	3200.00 Lin. Ft.
ADDITIONS: TWP RD 387-P	639.93 Lin. Ft.
NET LENGTH OF WORK	3839.93 or 0.727 Mi.

FILE No.	HOC. 278-6.01
	DATE OF LETTING _____ 196__
	CONTRACT No. _____

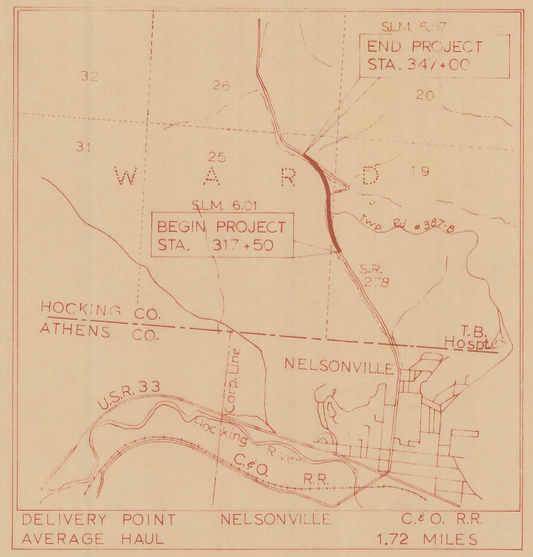

LOCATION MAP

SCALE OF MILES 0 ½ 1

* See Road Folder For Research

PORTION TO BE IMPROVED
STATE ROADS
OTHER ROADS

SCALE OF PLANS

PLAN 50
PROFILE (Horizontal) 50
" (Vertical) 10
SECTIONS 10

STANDARD DRAWINGS			
BP-5			
BP-6			
MC-1			
MC-3			
MC-4			
HW-E			
GR-1			
GR-2			
L-1			

SUPPLEMENTAL SPECIFICATIONS	

1965 SPECIFICATIONS

The standard specifications of the State of Ohio Department of Highways including changes and supplemental specifications listed in the proposed shall govern this improvement.

The right of way for this improvement will be provided by the State of Ohio.

I hereby approve these plans and declare that making of this improvement will require the closing to traffic of the highway and that detours will be provided as indicated on the plans.

Approved: Johnson Dowler
Date: 8-2-66 Division Deputy Director

Approved: _____
Date: _____ Engineer of Bridges

Approved: _____
Date: _____ Engineer of Location & Design

Approved: _____
Date: _____ Deputy Director of Design & Construction

Approved: _____
Date: _____ Deputy Director of Right-of-Way

Approved: _____
Date: _____ Deputy Director of Planning & Programming

Approved: _____
Date: _____ First Assistant Director

Approved: _____
Date: _____ Director of Highways

DESIGN DESIGNATION
Current A.D.T. = 380
Design Year A.D.T. = 689
D.H.V. = 46
D = 50
T = 8%
V = 30 M.P.H.

Drawn In AutoCad
Scanned 2013